



TAYLOR®

Item No. _____

168

Soft Serve Freezer

Twin Twist, Taylormate®

168



Features

Offer all the popular soft serve variations from low or non-fat ice creams to custards, yogurt and sorbet. Serve two separate soft serve flavors, or an equal combination of both in a twist.

Freezing Cylinder

Two, 1.5 quart (1.4 liter).

Mix Hopper

Two, 8 quart (7.6 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) in Auto and Standby modes.

Indicator Lights

The Mix Low light alerts the operator to add mix.

Solid State Controls

Taylor Quality Control (TQC) precisely monitors viscosity to maintain consistent quality.

Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.



Standard 6



SA2650




Selected 50 Hz. Models

Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
e-mail: info@taylor-company.com

International Office
Taylor Company S.r.l.
Roma, Italy
Tel: **+39-06-420-12002** Fax: +39-06-420-12034
e-mail: romeoff@taylor-company.com

ISO 9001:2000
Registered Firm

168Soft Serve Freezer

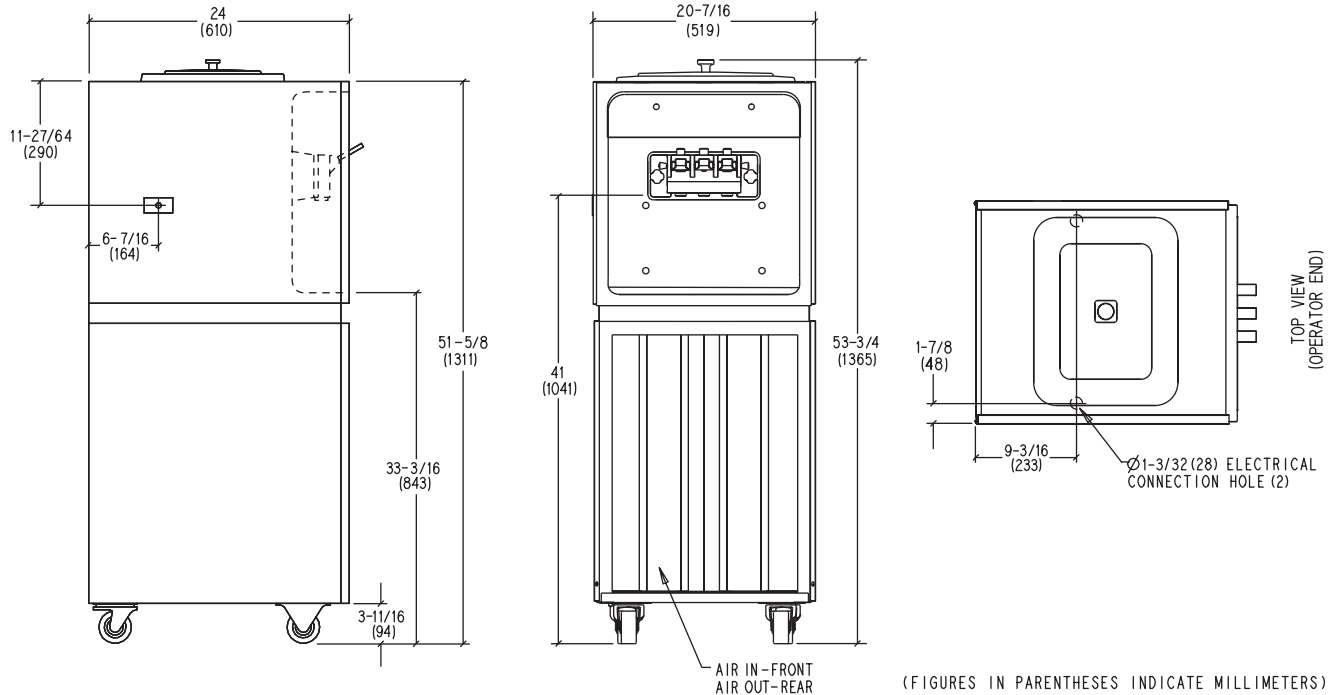

Weights	lbs.	kgs.
Net	425	192.8
Crated	487	220.9
	cu. ft.	cu. m.
Volume	30.2	.85

Dimensions	in.	mm.
Width	20-7/16	520
Depth	24	610
Height	53-3/4	1366
Floor Clearance	3-11/16	94

*Mounted on standard casters

Electrical Connections	Maximum Fuse Size		Minimum Circuit Ampacity		Poles (P) Wires (W)
	Left	Right	Left	Right	
115/60/1 Air	25	20	20	16	2P 3W
One Dedicated Connection	Maximum Fuse Size		Minimum Circuit Ampacity		Poles (P) Wires (W)
	Left	Right	Left	Right	
208-230/60/1 Air	20		20		2P 3W
220-240/50/1 Air	20		17		2P 3W

This unit may be manufactured in other electrical characteristics. Refer to the Distributor Data Book for availability. (For exact electrical information, always refer to the data label of the unit.)

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No Cooling: Air Water NA

Options: _____

Specifications

Electrical

One dedicated electrical connection is required, except 115 volt requires two dedicated connections. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

Beater Motor

Two, 0.5 HP

Refrigeration System

Two, 3,000 BTU/hr. R404A.

Separate Hopper Refrigeration (SHR), One, 400 BTU/hr. R134a. (BTUs may vary depending on compressor used.)

Air Cooled

Minimum 3" (76 mm) on all sides. Install the skirt provided on the rear of the unit to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Options

- Cone Dispenser
- Mix Low Chime
- Self Service Package (includes hopper locks, mix low chime, self service decal & flavor pads, and sneeze guard)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



Taylor Company,
 a division of Carrier Commercial Refrigeration, Inc.
 Rockton, Illinois 61072
 815-624-8333 800-255-0626 Fax 815-624-8000
 www.taylor-company.com

Printed in U.S.A.
 031289-ADV 8/04