

Carson, CA 90746 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Droi	iect	
FIU		٠

Model #: Item # :

Qty:

Available W/H :

Approval :

# Half Soild Door Refrigerator

# \_\_\_\_ FEATURES / BENEFITS \_\_\_\_

## DIGITAL TEMPERATURE CONTROL SYSTEM

Provides precise and constant temperature. This level of precision allows food products to remain fresh over an extended period of time.

### HIGH-TECH MONITOR

The monitor digitally displays the present temperature. You can easily change the temperature by adjusting the thermostat.

#### HOT GAS CONDENSATE SYSTEM

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

### EFFICIENT REFRIGERATION SYSTEM

M3's solid door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

#### AUTOMATIC EVAPORATOR FAN MOTOR DELAYS

Through stopping the evaporator fan when the refrigerator door opens, the circulation of hot, moist air into the refrigerator is prevented. This increases energy efficiency and lengthens the life of the compressor.

#### ADJUSTABLE, HEAVY DUTY, PE(POLYETHYLENE) **COATED WIRE SHELVES**

#### STAINLESS STEEL CABINET CONSTRUCTION

The Turbo Air M3 refrigerator model boasts a stainless steel exterior (galvanized steel top, bottom and back) and stainless steel interior with AL inside walls and door liners. It guarantees the utmost in cleanliness and long product life. Unlike other companies' products, the sharp corners and edges have been rounded to reduce the risk of injury. The M3 can add a touch of style to the most refined setting.

#### HIGH-DENSITY POLYURETHANE INSULATION The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### ERGONOMICALLY DESIGNED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

#### MAGNETIC DOOR GASKETS

Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.

#### TOP MOUNT COMPRESSOR UNITS

The refrigeration systems are designed to ensure that each part is properly sized and balanced to achieve the highest efficiency and perf



### **REFRIGERATOR HOLDS 33°F ~ 38°F** FOR THE BEST IN FOOD PRESERVATION

M3R72-6	6	72	9	1/2	11.3	559	773/4 x 303/4 x 78
Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D <sup>*</sup> x H <sup>†</sup> (inches)
performance.							R S WARRANTY (U.S.A.ory) Compressor U.S.A.ory) ENERGY STAR® Qualified

Ver.201304

\*Depth does not include 1-3/8" for rear condensate enclosure. + Height does not include 5" for caster height.

Reach-In Top Mounts M3 Series

# Model : M3R72-6

# Half Soild Door Refrigerator

## Model : M3R72-6

ELECTRICAL DATA				
Voltage	115/60/1			
Plug Type	() NEMA-5-15P			
Full Load Amperes	11.3			
Compressor HP	1/2			
Feed Wires with Ground	3			
Cord Length ft.	9			
Refrigerant	R-134A			
DIMENSIONAL DATA				
# of Doors	6			
# of Racks Accepted	3			
Net Capacity cu. ft.	72			
Ext. Length Overall in.	773/4 (1975mm)			
Ext. Depth Overall in.*	303/4 (781mm)			
Ext. Height Overall in. <sup>†</sup>	78 (1981mm)			
Int. Length Overall in.	737/8 (1877mm)			
Int. Depth Overall in.	245/8 (625mm)			
Int. Height Overall in.	605/8 (1539mm)			
Gross Weight lbs.	559			
# of Shelves	9			
Shelf Size (LxD) in.	231/2x251/4 231/2x231/8 231/2x251/4			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. \* Depth does not include 1-3/8" for rear condensate enclosure.

† Height does not include 5" for caster height.

#### WARRANTY : 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

#### INCANDESCENT INTERIOR LIGHTING

- DOOR LOCKS
- Self-Contained System
- 4" SWIVEL CASTERS
- Solid and Sturdy Grille Design
- TRAY RACK AVAILABLE (OPTIONAL)

#### OPTIONAL ACCESSORIES :

- □ 5" Diameter swivel casters
- □ 6" Standard legs

(II)

Interte

(EI)

- Additional PE coated wire shelves
- ☐ Half door bun tray racks. Each holds up to seven 18"Lx26"D sheet pans (sold separately)
- □ Full door bun tray racks. Each holds up to fifteen 18"Lx26"D sheet pans (sold separately)


E.

ISO9001

Turbo air

YEAR

NSF

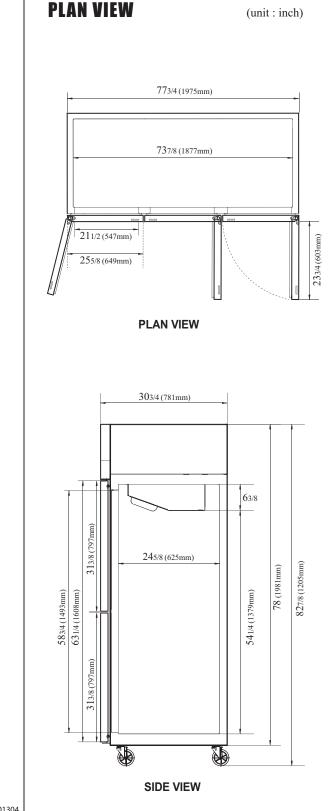

Ver.201304

Turbo Air: 800-627-0032
GK: 800-500-3519
Warranty: 800-221-7770
AC: 800-600-1002

■ Warranty : 800-381-7770 ■ AC : 888-900-1002

GREEN WORLD

**ENERGY STAR®** 

Qualified

5 YEAR WARRANTY

