



Item #:
Models: M60XR, M60XS, M60XT
Product Name: Master Series Ceramic Broiler
w/Upper Finishing Oven



Model M60XS

Specifications:

Heavy-duty gas ceramic broiler with oven and upper finishing oven, Model #M60XR. Two (2) 40,000 BTU (11.72 kW) large cast iron multi-jet burners. Adjustable broiler rack with removable grid. Porcelain enamel oven interior measuring 26 1/4" (667mm) wide x 13 1/2" (343mm) high x 29" (737mm) deep. 40,000 BTU (11.72 kW) cast iron oven burner. Stainless steel front with black powder coat epoxy sides. 120,000 BTU (35.16 kW) total. Natural or propane gas. AGA, CGA certified and NSF listed. (Also available with storage base, Model #M60XS, modular top, Model #M60XT).



Standard Features:

- Stainless steel front; black powder coat epoxy sides
- 6" (152mm) chrome steel adjustable legs
- 7-1/2" (191mm) stainless steel front rail
- Porcelain interior finishing oven
- Two large cast iron multi-jet burners, 80,000 BTU (23.44 kW) total, (natural gas)
- Removable broiler grid
- 5 position adjustable rack
- On/Off control for broiler
- Piezo spark ignition for oven
- Fully porcelainized oven interior
- 40,000 BTU (11.72 kW - natural gas)/35,000 BTU (10.25kW - propane) cast iron oven burner
- One year limited parts & labor warranty (USA & Canada only)

Optional Features:

- Stainless steel left, right or both sides
- Stainless steel main back
- Convection oven base, add C to Model No., e.g. M60XRC
- Additional oven rack
- Rear gas connection, 1-1/4" NPT (battery installation), 3/4" NPT (stand-alone installation)
- End caps and cover (no charge) - must specify
- Swivel casters (4) w/front brakes
- Polyurethane non-marking swivel casters (4) w/front brakes
- 6" (152mm) stainless steel adjustable legs
- 4" (102mm) chrome steel adjustable legs
- Toe base or curb mount (not for use with "RC" oven base)
- Storage cabinet with doors
- 230 volt, 50 cycle components, RC motor (export)
- Celsius dial for oven thermostat (no charge)

NOTE: Broilers supplied with casters must be installed with an approved restraining device.

Garland Commercial Industries, Inc.
185 East South Street
Freeland, Pennsylvania 18224
Phone: (570) 636-1000
Fax: (570) 636-3903

Garland Commercial Ranges Ltd
1177 Kamato Road, Mississauga, Ontario
L4W 1X4 CANADA
Phone: 905-624-0260
Fax: 905-624-5669

Enodis UK LTD
Swallowfield Way, Hayes, Middlesex
UB3 1DQ ENGLAND
Telephone: 081-561-0433
Fax: 081-848-0041




Item #: Models: M60XR, M60XS, M60XT
 Product Name: Master Series Ceramic Broiler w/Upper Finishing Oven

Product	Width: In(mm)	Depth: In(mm)	Height: In(mm) (w/ NSF Legs)	Oven/Storage Base Interior: In(mm)		
				Width	Depth	Height
M60XR	34(864)	38(965)	72-1/8(1831)	26-1/4(667)	29(737)	13-1/2(343)
M60XS	34(864)	38(965)	72-1/8(1831)	26(665)	30-1/2(773)	20-1/2(519)
M60XT	34(864)	38(965)	44-1/2(1130)	N/A	N/A	N/A

INPUT-BTU/hr (Natural Gas)	M60XR	kW Equivalent	M60XS	kW Equivalent	M60XT	kW Equivalent
Top Section	80,000	23.44	80,000	23.44	80,000	23.44
Oven	40,000	11.72	N/A	-	N/A	-
TOTAL	120,00	35.16	80,000	23.44	80,000	23.44

RC=Range w/Convection Oven R=Range w/Oven S=Range w/Storage Base T=Modular Top

INSTALLATION NOTES			Shipping Wt: (Lb/Kg)
Combustible Wall Clearances ¹ Sides: 6" (152mm) Back: 6" (152mm)	Entry Clearances	Manifold Pressure	M60XR 750/341
	Crated: 39-1/4" (997mm) Uncrated: 34-1/4" (870mm)	Natural: 6" WC (15mbar) Propane: 11" WC (28mbar)	M60XS 650/295 M60XT 560/255

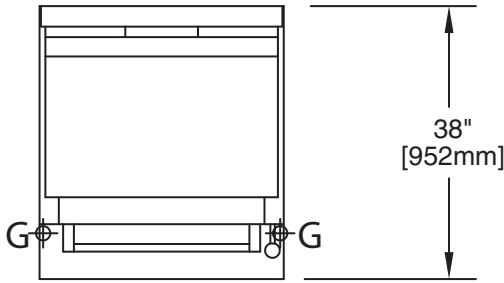


¹NOTE: Installation clearance reductions are applicable only where local codes permit.

Data applies only to North America

Gas input ratings shown here are for installations up to 2,000 Ft. (610m) above sea level. Specify altitudes over 2,000 Ft.

Electrical characteristics each RC oven: 1/3 HP motor, 120 VAC, single phase, 3.4 amps, 6 ft. (1.8m) power supply cord provided. 230 VAC export is direct connect, single phase, 50 Hz.

Please specify gas type when ordering.

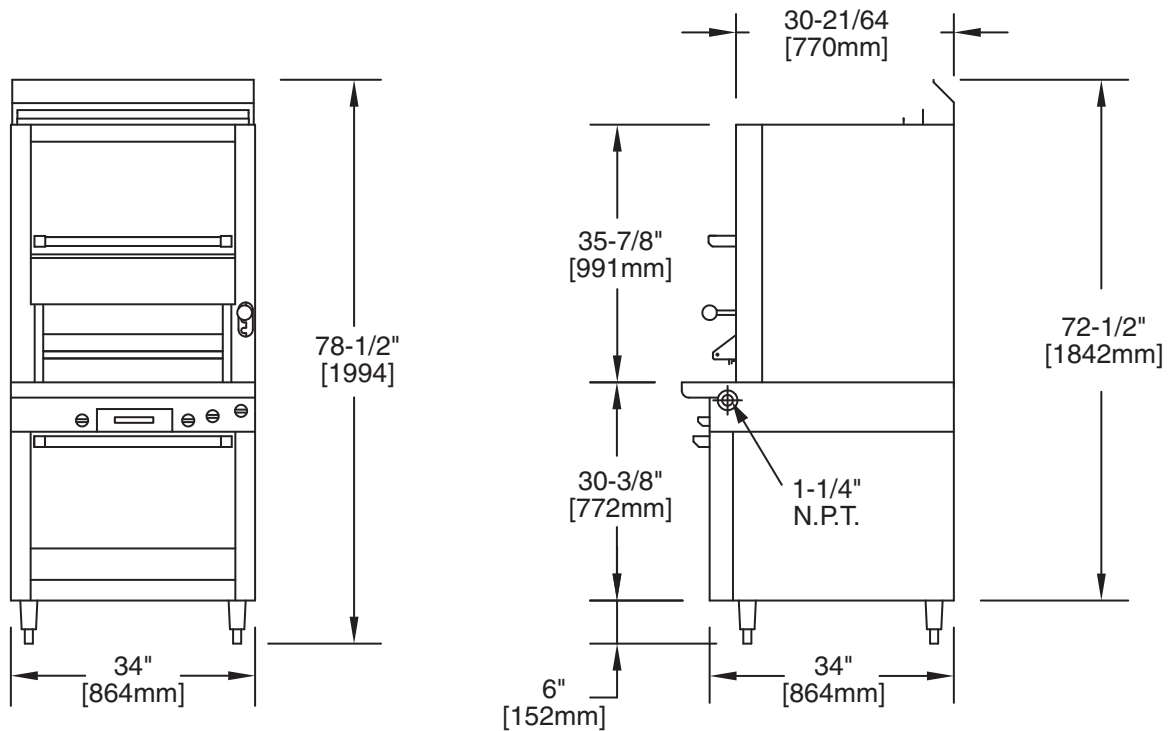

Continuous product improvement is a Garland policy.