


■ **Model 65S/ETL Cookie Depositor** ■  
Superior Performance by Design

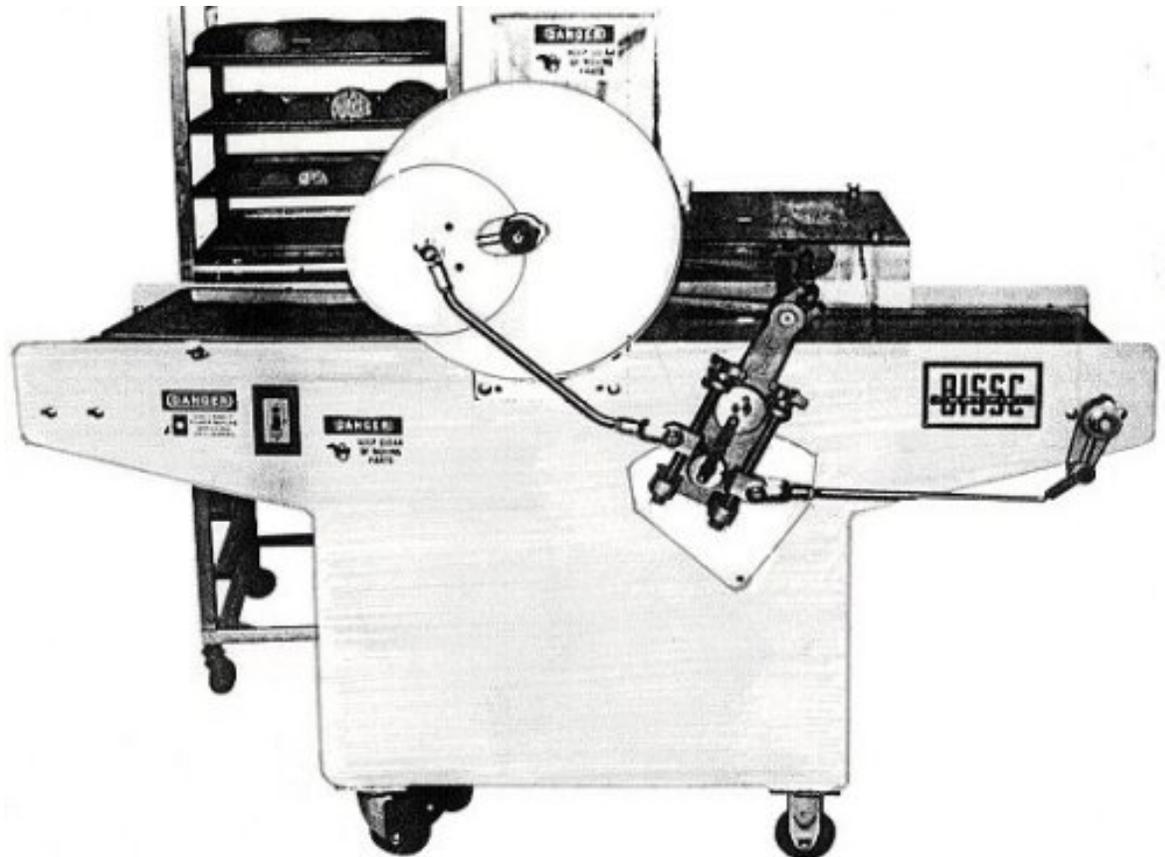

**CMC America - Model 65S/ETL Cookie Depositor**  
**The automatic cookie depositor that grows with your business.**

**CMC America Model 65S/ETL won't become obsolete easily. its functions are so flexible that it fits your production requirements regardless of your volume. As you grow, so does the output of the CMC America 65S/ETL.**

- Variable speed motor for 90 dozen to 1,200 dozen cookies per hour.
- Dough feed and pan speed fully adjustable to fit your production requirements.
- Wide range of dies in stock. Custom dies available.
- Rollers designed to extrude doughs of most consistencies, regular to hard.
- Hopper capacity of 30 quarts. 60 quarts if you need it.

**The flexibility to grow with your business PLUS these features:**

- Needs only a 66" x 32" floor area.
- Sturdy 5" casters make it easily movable.
- Takes seconds to remove parts for cleaning.
- Safety guard to keep moving parts totally enclosed.
- Backed by CMC America's experience in bakery machinery since 1888.

**Construction:**

Frame and base electrically welded steel to form rigid one piece unit. Equipped with shelf for die storage.

**Sanitation:**

All parts in contact with dough and under the product zone are rustless:

- Stainless steel hopper.
- Stainless steel table top - 22" x 65".
- Stainless steel feed roll shafts.
- Polyurethane feed rolls.
- Aluminum alloy die holder, and dies.
- Aluminum alloy cutter fingers.

Above parts easily removable without the use of tools for washing after use without taking mechanical drive components (like gear and clutches) to the sink >

**Hopper:**

30 quart capacity is standard - larger sizes available.

**Drive:**

Compact fully enclosed geared in head motor unit with reduction gears running in oil bath and with direct linkage drive.

Drive gears operate feed rolls and pan belts through silent automatic clutches.

Pans ride on two adjustable V belts.

Feed rolls are striated for positive dough feed.

Variable speed - 35-70 strokes per minute.

Adjustable knob for cookie thickness.

Adjustable knob for cookie spacing.

**Drive Motor:**

1/2 H.P., 1 phase, 115 volt, or 3 phase, 220 volt, complete with three wire 8 ft. cord with molded three prong grounding plug and adapter.

**Switch:**

Snap type with thermal overload and Safety Light.

**Lubrication:**

Pressure grease fittings and oil fittings.

Rustless metal lubrication chart (showing points of lubrication) affixed to machine.

**Pan Guide:**

Adjustable for 17" to 19" pans.

**Dies:**

Dozens of rustless aluminum dies available. See separate die sheet.

**Finish:**

Best grade white enamel.

**Size:**

66" x 32" x 56" high. Shipping weight - 510 lbs.

**Max. Cookie Weight: \***

1/4 - 6 oz.

\* Depends on the specific gravity of dough.

**Approvals:** ETL, BISSC.

