



Quality Made in the USA

Product Guide

SEMI-AUTOMATIC COMBINATION SHRINK PACKAGING SYSTEM

MODEL HS-115

SEMI-AUTOMATIC COMBINATION SHRINK SYSTEM

HEAVY DUTY CONSTRUCTION
THROUGHOUT

STANDARD IMPULSE SEAL

UL LISTED CONTROL PANEL



OUR MOST POPULAR, DEPENDABLE, COMBINATION SYSTEM

FEATURES

Control Panel

- U.L. Listed Control Panel
- RS-3 Digital Controller For Easy System Setup and Operation with Built In Diagnostics and Alarms
- Single Plug 115V power supply with GFCI

Sealing Area

- Large 15" W by 20" L Seal Area
- Heavy Duty Seal Head Design With Film Clamps
- Adjustable Height Wrapping Platform
- Mechanical Cold Hole Punch
- Pre-Wired Power Take Away Ready

Shrink Tunnel

- Digital Tunnel Temperature Control
- High Velocity Turbo Tunnel Design
- 6" H by 15" W Tunnel Opening
- Adjustable Heat Tunnel Conveyor Belt For Bottom Shrink Control
- Automatic Cool Down

Other Features

- *RAPIDHS* - Standard Machine Options will Ship in 5 Days or Less
- Two Year Warranty
- Heavy Gauge Steel Construction
- Stainless Steel Model Available

TWO YEAR WARRANTY

REVISED 2011



Quality Made in the USA

Product Guide

SEMI-AUTOMATIC COMBINATION SHRINK PACKAGING SYSTEM

MODEL HS-115

Machine Specifications

Film Capacity 17" Wide (43 cm)

L Bar Seal Area 15" W, 20" L (38 W, 51 L cm)

Inside Tunnel Dimensions 22" L, 14 1/2" W, 6" H
(53 L, 37 W, 15 H cm)

Tunnel Conveyor Speed 0-20 Feet per Minute
(0-6 meters per minute)

Overall Dimensions 84" L, 23" W, 49" H
(213 L, 58 W, 125 H cm)

Working Height 35" (89 cm)


Power Requirements 115 Volts, 20 Amp
Single Circuit with Ground

Wattage Tunnel: 2,000 Watts
Conveyor Belt: 500 Watts


Weight 350 lbs. (159 kg) (without leg kit)
450 lbs (204.5 kg) (with leg kit)

Machine Footprint

TOP VIEW

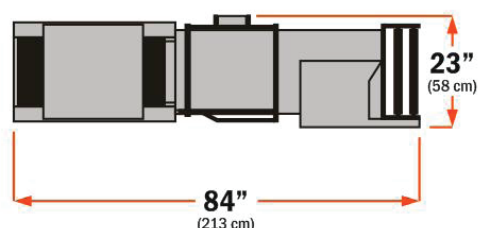

FRONT VIEW

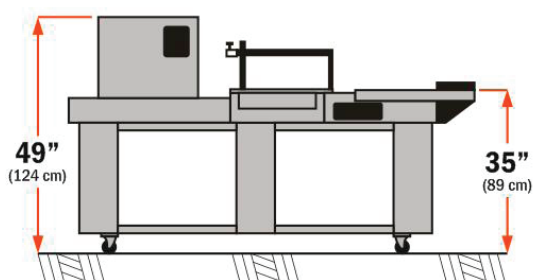

Options

- Export Wire/220 Volts
- Hot Hole Punch or Adjustable Hot Hole Punch with Articulated Arm
- Magnetic Hold Down With Dwell (Single or Dual Magnet)
- Posi-Trac Power Take Away
- Gravity Discharge Conveyor
- Power Take Away Conveyor (Silicone Belt)
- 8" High Tunnel Opening
- Console Leg Kit With 3" Casters
- 6" Film Separator Rod
- Dual Film Rack
- Three Individually Adjustable Perforating Wheels
- Stainless Steel Construction
- Spare Parts Kit
- GTC-90 and 180 Gravity Turn Around Conveyors
- Powered Accumulator Table

REVISED 2011