## **BUNN**°

# 12 Cup Automatic Coffee Brewer with 6 Warmers

ITEM#		
PROJECT		

DATE



## Model CWTF 0/6 Twin

(decanters sold separately)
Dimensions: 20.54" H x 30.75" W x 20.64" D
(52.17cm H x 78.11cm W x 50.43cm D)

#### Features

#### 12 Cup Automatic Coffee Brewer

- Twin brew head systems.
- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Six individually controlled warming stations.
- · All stainless steel construction.
- · Includes hot water faucet.
- · Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.

For current specification sheets and other information, go to www.bunn.com.

#### Related Products

Easy Clear® EQ-17-TL

Product No.: 30200.1000

Dimensions:

 $12^{7}\!\!/_{16}$  " H x  $2^{1}\!\!/_{2}$  " W x 3 " D 31.6 cm H x 6.35 cm W x 7.62 cm D

Easy Clear® ED-17-TL

Product No. : 30201.1001 Dimensions:  $8\frac{1}{4}$ " H x  $2\frac{5}{16}$ " Dia.

20.95 cm H x 5.87 cm Dia.

Paper Filter Pack
Product No.: 20115.0000

Packed per case: 1,000

Dimensions: 41/4" Base x 23/4" Sidewall 10.8 cm Base x 6.98 cm Sidewall

Easy Pour® black decanter

Product No.: 06100.0101 Quantity: 1 (also packaged in

quantities of 2, 3, 6, 12, & 24)

Easy Pour® orange decanter (for decaf)

Product No.: 06101.0101
Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



## 1GPR SS Portable Server on an RWS1 Warmer

1GPR Product No.: 12487.0001\* RWS1 Product No.: 12203.0010 \*Also available with side handles

or black decor.



For current specification sheets and other information, go to www.bunn.com.

Model Agency Listing

CWTF 0/6 Twin 

Patents Apply 10/09 A1.8

### Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater	Total	Brewing	Cu.	Shipping	Cord
				Watts	Watts	Capacity	Ft.	Weight	Attached
CWTF 0/6 Twin	23400.0020	120/240	28.75	2 @ 3000	6850	15.0 gal./hr.	11.6	74 lbs.	No
CWTF 0/6 Twin*	23400.0026	120/240	28.75	2 @ 3000	6850	15.0 gal./hr.	11.6	74 lbs.	No

<sup>\*</sup>Plastic funnel

Two power cords are required but not supplied. Amp rating is for each cord.


Machine has two 3000 watt tank heaters.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 3-wires plus ground, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with  $\frac{3}{8}$ " male flare fitting.

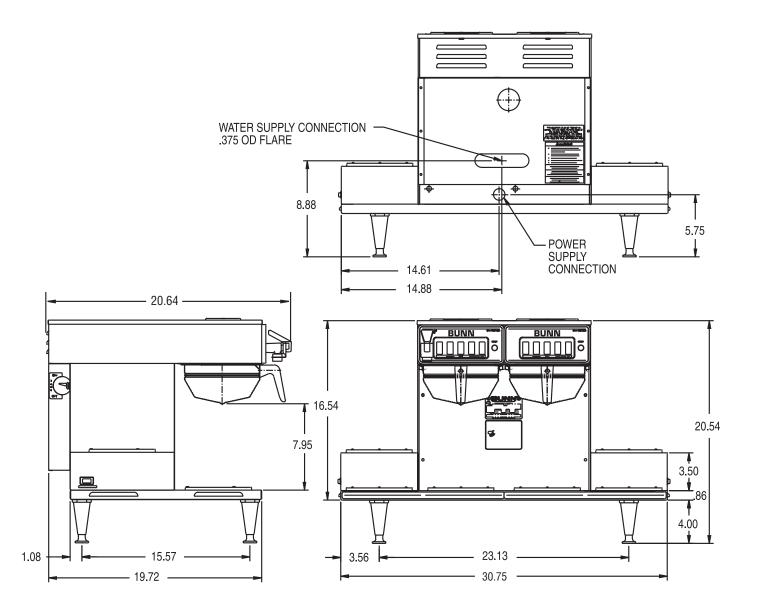

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.