

Appliance Specifications




JOB: _____

ITEM NO: _____

INSULATED HOLDING CABINET MODEL H-137-UA-12B

FEATURES AND BENEFITS:

- Fully insulated holding cabinet keeps prepared foods at serving temperatures.
- Powerful, yet efficient, 2000 Watt heating system with humidity pan maintains the right temperature to properly hold products. Heats up to 200°F (93°C.)
- Internal frame in body and doors maintains structural rigidity.
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility. One piece extended base protects cabinet body.
- Self-closing insulated Dutch doors prevent temperature loss; magnetic door gaskets for proper seal. Field reversible for flexibility.
- Standard with right hand hinging; left hand hinging available upon request
- Full length extruded door handles for "easy open"; positive catch secures door during transport
- Recessed push/pull handles on both sides prevent damage to walls; allows easy maneuvering.
- Twelve sets of extruded universal angles accommodate a large variety of pan sizes on adjustable 1-1/2" centers.
- Slanted control panel has easy-to-read thermometer; entire assembly removable for cleaning and maintenance.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

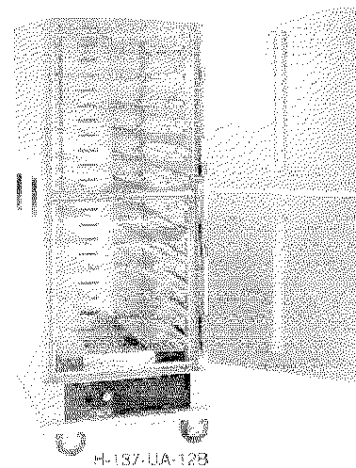

ACCESSORIES and OPTIONS (Available at extra cost):

- Lexan Door Windows
- Extra Universal Angles
- Corner Bumpers
- Perimeter Bumper
- Floor Lock (for use with 5" casters)
- Various Caster Options
- Digital Thermometer
- 208 or 240 Volt Service

See page B-20 for accessory details.




12825 Taft Ave. • Cleveland, OH 44108-1683
Phone: 800/321-7174 • Fax: 216/651-9734

Page B-5
Sept., 1995

Appliance Specifications

H-137-UA-12B

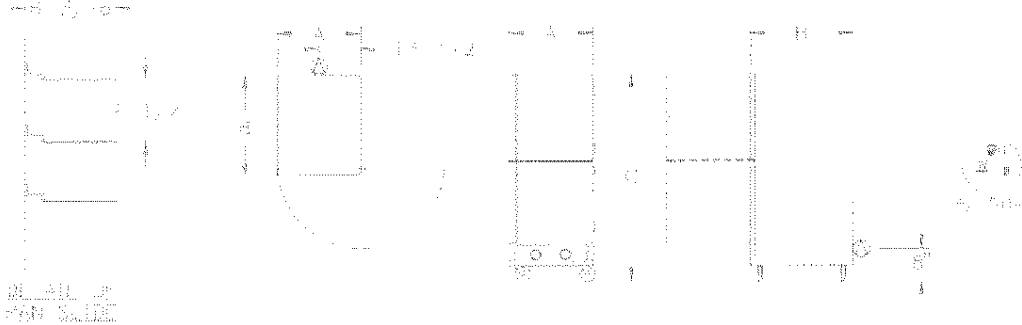

CRES-COR MODEL NO.	PAN		DIM "A" WIDTH	DIM "B" DEPTH	DIM "C" HEIGHT	INSIDE DIMENSIONS			WEIGHT ACT.
	CAP/ANGLES	SIZE				WIDTH	DEPTH	HEIGHT	
H-137-UA-12B	12	SEE NOTE	IN 28	35-5/8	59-3/4	21-3/4	28	54-11/16	LBS 309
	SETS	BELOW	CM 71.1	90.5	177.2	55.2	71.1	138.9	KG 140

NOTES: 1. Pan sizes 22" x 20" (55.8 x 50.8) Roast & Bake Pans, 10" x 20" (25.4 x 50.8) Roast & Bake Pans, 18" x 26" (45.7 x 66.0) Bun Pans, 14" x 18" (35.5 x 45.7) Service Trays, 12" x 20" (30.4 x 50.8) Steam Table Pans.
Refer to Pan Size Chart at end of section.
2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:

- Body: .063 aluminum.
- Reinforcement: Internal framework of extruded angles, 1-1/4 x 1-1/4 x .188
- Insulation (walls, doors, base, top): 1-1/2" fiberglass, thermal conductivity (K factor) is .23 at 75 F.
- Air tunnel: .063 aluminum lift-out type, mounted on back panel.
- Push/out handles (4): Black plastic; 5-1/2" vertical, recessed.
- Water pan: 3-1/2 pint capacity; .063 aluminum.

BASE:

- One piece construction, .190 aluminum.
- Casters: 5" dia. swivel, neoprene tires, 1-1/4 wide, load cap. 200 lbs. each; temp. range -20° to 160° F. Bearings are sealed and permanently lubricated. Front casters equipped with brakes.

DUTCH DOORS:

- Field reversible.
- Exterior: Formed .063 brushed aluminum.
- Interior: 22 ga. #30 stainless steel.
- Latches: Positive transport type.
- Extruded handles.
- Hinges: Self closing, stays open past 90°.
- Gaskets: Perimeter type, magnetic Santoprene.
- Part stop channels: Riveted to inside of doors.

PAN SLIDES:

- Extruded angles, 2 x 5-3/16 x .110 mounted on lift-out posts.
- Spaced on 4-1/2" centers; adjustable on 1-1/2" centers.

HOT UNIT COMPONENTS:

- Removable bottom mount hot unit.
- Body: Formed .063 aluminum with black control panel.
- Thermostat: Electro-mechanical, room ambient to 200°F. (93°C.).
- Pilot light.
- Switch: Lighted ON-OFF rocker type.
- Power cord: Permanent, 6 ft., 12/3 ga. with molded right angle plug.
- Heater: 2000 Watts.
- Blower motor.
- Thermometer.

POWER REQUIREMENTS:

- 2000 Watts, 120 Volts, 60 Hz., single phase, 15.6 Amps.

SHORT FORM SPECIFICATIONS

Cres-Cor Insulated Holding Cabinet Model H-137-UA-12B. Inner, outer and top liners of .063 aluminum, reinforced with internal extruded frame, (12) sets extruded universal angles for multiple pan sizes, adjustable spacing every 1-1/2". Field reversible Dutch doors, outer .063 brushed aluminum, inner 20 ga. 430 stainless steel. Fiberglass insulation in sides 2"; back and doors 1-1/2". Removable 2000 Watt, 120 Volt power unit. One piece insulated base, .190 aluminum. 5" swivel neoprene casters, permanently lubricated, sealed ball bearings. Load capacity 200 lbs. each. 2 year parts warranty. Provide the following accessories: _____ NSF, UL listed.



12825 Tait Ave. • Cleveland, OH 44108-1683
Phone: 800/321-7174 • Fax: 216/851-9734

© Crescor Metal Products, Inc. 1989. All rights reserved.

In line with its policy to continually improve its products, CRES-COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.