

**Project:** 

Item Number:

Quantity:

# INDUCTION RANGE: MIRAGE<sup>®</sup> CADET COUNTERTOP



Mirage<sup>®</sup> Cadet 59300 Countertop Induction Range

### DESCRIPTION

The portable countertop induction range is designed for use in light duty front-of-the-house cooking. Models 59300 and 59310 will plug into standard, dedicated 15A outlets which are readily available in most restaurants and kitchens.

The induction range comes complete with a 6-ft. (183 cm) power cord and plug. The top case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner. The bottom case assembly is durable molded plastic.

The induction ranges are equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off
- □ Safety auto-shut-off function

#### Agency Listings — 59300



This device complies with Part 18 FCC Rules.

#### Agency Listings — 59310



This device complies with Part 18 FCC Rules.

Due to continued product improvement, please consult www.vollrathco.com for current product specifications.



## MODELS

- 59300 1.8kW @ 120V (U.S. only)
- 59310 1.4kW @ 120V (Canada only)

### **FEATURES**

- G1 engine with 1 IGBT switch for temperature control
- □ Full one-year parts and labor warranty
- □ 20 power levels with optimum power output to a wide variety of induction-ready cookware
- □ 1-20 power levels or °F/°C temperature level controls
- □ Easy to read digital readout for power level
- □ 1-180 minute timer
- Pushbutton controls
- □ Stainless steel case and top. Molded plastic bottom
- □ Unit comes with cord and plug and does not require hard wiring
- Ranges display HOT when unit is turned off, if the cooking surface is still hot
- □ FCC listed

## IMPORTANT

- This appliance is intended for use with induction-ready cookware.
- □ All models require adequate unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 3 inches (7.6 cm) at the rear and 1/2 inch (1.27 cm) at the bottom.

**WARRANTY:** All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

**Approvals** 

Date

Induction Range: Mirage<sup>®</sup> Cadet Countertop

Sheboygan, WI 53081-3201 U.S.A. Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560

Technical Services: 800.628.0832 Technical Services Fax: 920.459.5462

www.vollrathco.com

The Vollrath Company, L.L.C. 1236 North 18th Street

Main Fax: 800.752.5620 or 920.459.6573


### INDUCTION RANGE: MIRAGE<sup>®</sup> CADET COUNTERTOP


MODELS 59300 1.8kW @ 120V (U.S only)

59310 1.4 kW @ 120V (Canada only)

### DIMENSIONS

- □ Shipping container dimension: 16" x 19¼" x 6½" (40.6 cm x 49 cm x 16.5 cm)
- □ Weight of unit: 10 lbs. (4.5 kg)
- □ Shipping weight: 12.2 lbs (5.5 kg)
- Dimensions shown in inches (cm)



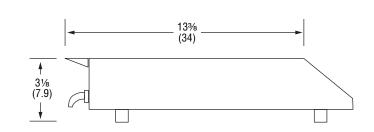

#### **ELECTRICAL SPECIFICATIONS - 1 PHASE, 60 HZ**

Model	kW Rating	Volts	Nominal Amps	NEMA Plug	Remarks
59300	1.8 kW	120V AC	15	5-15P	
59310	1.4 kW	120V AC	12	5-15P	







The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560 Main Fax: 800.752.5620 or 920.459.6573 Technical Services: 800.628.0832 Technical Services Fax: 920.459.5462

www.vollrathco.com

©2010 The Vollrath Company L.L.C Form Number L35790 12/10 Printed in USA