



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

**TS (Stainless In / Out) Series,
Freezers**



TS-49F

TRUE, rated the #1 brand in America.

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- 300 series stainless steel interior and exterior.
- Barrel lock standard for each door. Locks keyed alike.
- Solar, digital exterior temperature monitor, large LED display for quick and easy temperature identification.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection. Frame rail fitted with 4" diameter castors, front castors include brakes.
- Rear wall airflow guard prevents frozen products from blocking optimal airflow.

All Stainless Reach-In Freezers

- TS-23F**, **TS-35F**,
- TS-49F**, **TS-72F**

SPECIFICATIONS / FEATURES

DOORS:

- 300 series stainless steel interior and exterior. Doors extend full width of cabinet shell. Door gaskets of one piece construction, and removable without tools for ease in cleaning.
- Lifetime guaranteed adjustable torsion type closure system with aluminum block supports. The face of each door fitted with a 12" long recessed handle with sheetmetal interlock. Handles are foamed-in-place to insure permanent attachment.

INSULATION:

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- Adjustable vinyl coated wire shelves (3 per door). Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

LIGHTING:

- Incandescent interior lighting. Light(s) activated by rocker switch mounted above door(s).

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 404A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain -10°F interior cabinet temperature.
- Defrost system time initiated, temperature terminated.
- * Automatic evaporator fan motor delay during defrost cycle.
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



T-72F
115/208-230/1
NEMA-14-20R



TS-35F
TS-49F
115/60/1
NEMA-5-20R



T-23F
115/60/1
NEMA-5-15R

*Remote cabinets available 14% off list
(condensing units supplied by others).
Consult factory technical service dept. for BTU information.*

Specifications subject to change without notice.

Printed in
U.S.A.




APPROVALS:

11/03

Exceptions:



TS-Series: All Stainless Reach-In Freezers

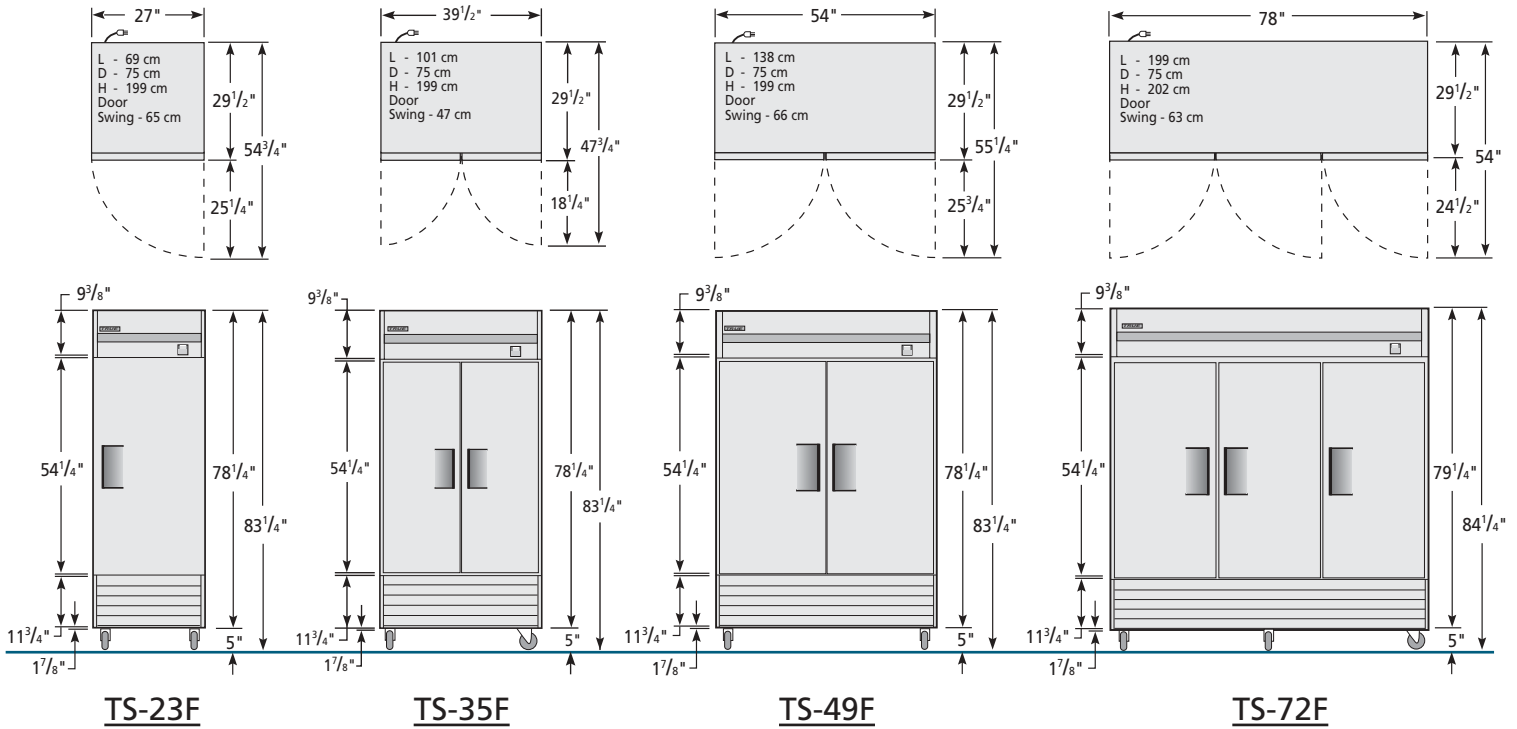

Rough-In Data													
Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D	H*							
TS-23F (1)	1	23	3	27	29 1/2	78 1/4	1/2	115	1	10.4	5-15	9	330
TS-35F	2	35	6	39 1/2	29 1/2	78 1/4	3/4	115	1	13.0	5-20	9	480
TS-49F (1)	2	49	6	54	29 1/2	78 1/4	3/4	115	1	13.2	5-20	9	550
TS-72F (1)†	3	72	9	78	29 1/2	79 1/4	1	115/208	1	10.5	4-20	9	720

(1) Available with full glass or solid half door.
 * Height does not include 5" for castors or 6" for optional legs.
 † Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire.

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly (404A) refrigeration system holds -10°F.
- 300 series stainless steel interior and exterior.
- Recessed door handles (lifetime guaranteed).
- Exterior mounted, solar, digital temperature monitor, large LED display for quick and easy temperature identification.
- Door locks standard.
- Interior airflow backguard provided for improved airflow.
- Magnetic door gaskets.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Incandescent interior lighting.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Defrost system time initiated, temperature terminated.
- Automatic evaporator fan motor delay during defrost cycle.
- 4" diameter swivel castors standard equipment - locking castors provided for front set.
- Self contained system.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty (USA).

Optional Accessories

- 6" stainless steel or optional seismic legs.
- Additional shelves available.
- Remote cabinets. Consult factory for info.

Model	Front	Right	Plan	3D
TS-23	TFEY83E	TFEY03S	TFEY03P	TFEY033
TS-35				
TS-49	TFEY82E	TFEY02S	TFEY02P	TFEY023
TS-72	TFEY81E	TFEY01S	TFEY01P	TFEY013



TRUE FOOD SERVICE EQUIPMENT

