



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

T-Series Reach-In Refrigerators



T-49

TRUE, rated the #1 brand in America

**Solid Door Reach-In Refrigerators
(two & three door models)**

T-35, T-49, T-72

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- 300 series stainless steel front grill, shroud and doors. Anodized quality aluminum exterior ends and back.
- NSF approved, white vinyl coated aluminum and 300 series stainless floor with coved corners.
- Barrel lock standard for each door. Locks keyed alike. Dial exterior mounted temperature monitor.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection. Frame rail fitted with 4" diameter castors, front castors include brakes.

DOORS:

- 300 series stainless steel exterior with white aluminum interior to match cabinet liner. Doors extend full width of cabinet shell. Door gaskets of one piece construction.
- Lifetime guaranteed adjustable torsion type closure system with aluminum block supports. The face of each door fitted with a 12" long recessed handle with sheetmetal interlock. Handles are foamed-in-place to insure permanent attachment.

INSULATION:

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- Adjustable vinyl coated wire shelves (3 per section). Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

LIGHTING:

- Incandescent interior lighting. Light(s) activated by rocker switch mounted above door(s).

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.

- A sole use circuit is required.



115/60/1
NEMA-5-15R

Specifications subject to change without notice.

Also available:

- Single Door Models
- Top Mounts
- Glass Door Models
- Half and Combination Doors
- Slide Door Models
- Freezers
- All Stainless Steel In / Out
- Heated Cabinet (solid & glass door)
- Dual Temperature Model

Remote cabinets and condensing units available for models T-23, T-49, and T-72. For other models remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.

Printed in U.S.A.




Exceptions:

APPROVALS:



T-Series: Solid Two & Three Door Reach-In Refrigerators

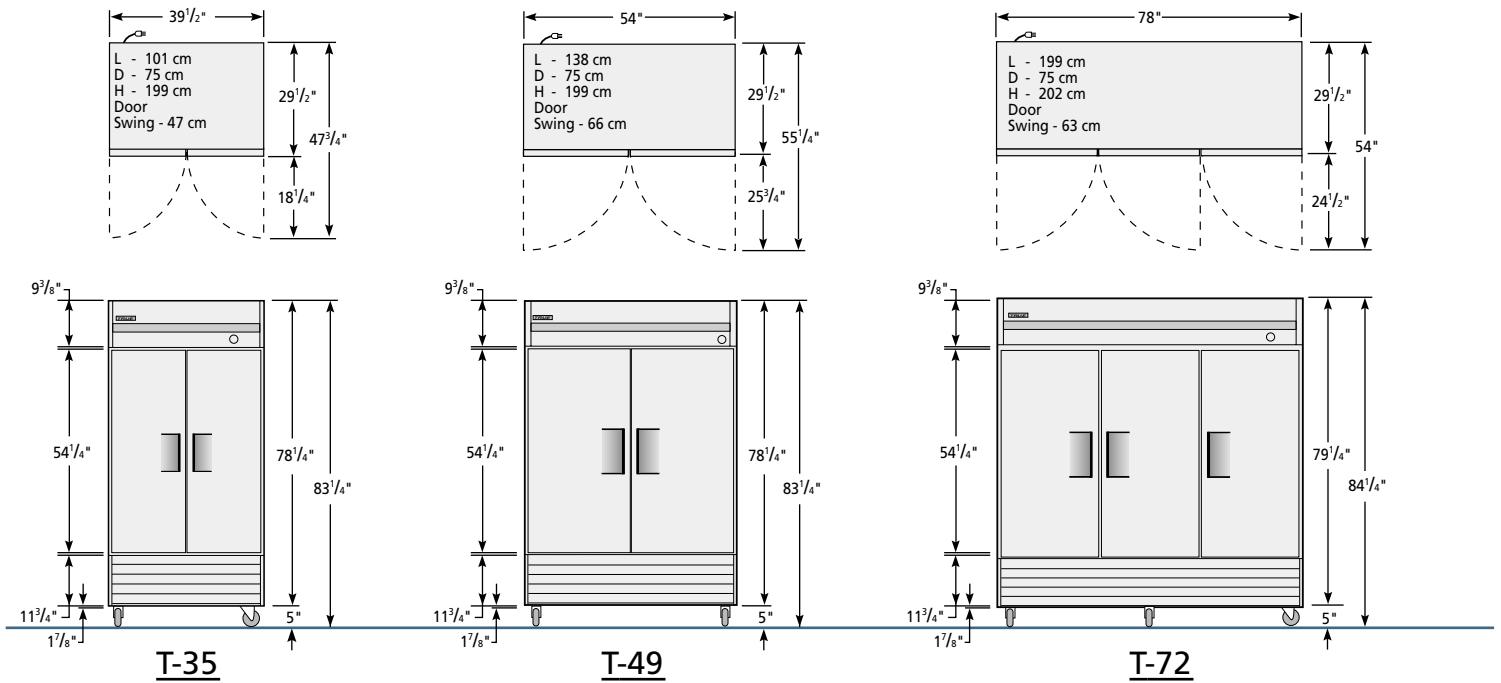

Rough-In Data

Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D	H*							
T-35 (1)	2	35	6	39 1/2	29 1/2	78 1/4	1/2	115	1	9.2	5-15	9	359
T-49 (1, 2)	2	49	6	54	29 1/2	78 1/4	1/2	115	1	9.5	5-15	9	425
T-72 (1, 2)	3	72	9	78	29 1/2	79 1/4	1/2	115	1	11.8	5-15	9	576

- (1) Available with full glass doors
 (2) Available with solid half doors, glass half doors & combination solid/glass half doors
 * Height does not include 5" for castors or 6" for optional legs.

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly (134A) refrigeration system - holds 33°F to 38°F.
- 300 series stainless steel doors & front.
- Interior - NSF approved, white vinyl coated aluminum sides and top, 300 series stainless steel floor with covered corners.
- Anodized quality aluminum top, sides and back.
- Recessed handles (lifetime guarantee).
- Exterior mounted temperature monitor.
- Door locks standard.
- Magnetic door gaskets.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Incandescent interior lighting (fluorescent interior lighting for glass door models).
- 4" diameter swivel castors standard equipment - locking castors provided for front set.
- Foamed-in-place polyurethane high density cell insulation (CFC free).
- Slide out compressor can be serviced easily and accessed by a single repairman.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.

Optional Accessories

- Left hinged model available on the T-23 (no charge)
- Dual left or right hinges available on the T-49 (no charge)
- T-72 available with three right or three left hinges (no charge).
- Available with 6" stainless steel or optional seismic legs.
- Additional shelves available
- T-49 available as a pass-thru model (T-49PT).
- T-72 available with optional wine racks.
- T-49 & T-72 available with optional novelty baskets.

Model	Front	Right	Plan	3D
T-35	TFEY04E	TFEY04S	TFEY04P	TFEY043
T-49	TFEY02E	TFEY02S	TFEY02P	TFEY023
T-72	TFEY01E	TFEY01S	TFEY01P	TFEY013

Clearance Required For Coolers (USA)		
Sides Inches/mm	Top Inches/mm	Rear Inches/mm
0 / 0	0 / 0	1 / 26



TRUE FOOD SERVICE EQUIPMENT