



**TRUE FOOD SERVICE EQUIPMENT, INC.**

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366  
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model #: \_\_\_\_\_

AIA #

SIS #

**Standard Depth Undercounter Units**



**TUC-48**

**Standard Depth Undercounter Units**

- TUC-27,  TUC-36,
- TUC-48,  TUC-60,
- TUC-72

*True's undercounter refrigeration slides under work counters for space efficiency or provides a functional work surface for easy food preparation.*

**SPECIFICATIONS / FEATURES**

**CABINET CONSTRUCTION:**

- Stainless steel front, top and ends. Aluminum finished back.
- White, vinyl coated aluminum interior cabinet liner with 300 series stainless steel floor with coved corners. Construction of liner in accordance with NSF standards.
- 5" diameter stem castors (optional 6" adjustable stainless steel legs available).

**DOORS:**

- Stainless steel exterior with white aluminum interior to match cabinet liner. Doors extend full width of cabinet shell. Door gaskets of one piece construction, and removable for ease in cleaning.
- Doors include 12" long horizontal recessed handle with sheetmetal interlock. Handles foamed-in-place to insure permanent attachment.

**INSULATION:**

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

**SHELVING:**

- Adjustable vinyl coated wire shelves (2 per door). Shelves capable of supporting up to 250 lbs. (not included in drawer models)
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

**Also available:**

- *Glass door models*
- *Drawer models*  
*(hold one 12" x 20" x 6", full size pan per drawer; not included)*
- *Freezer models*

**REFRIGERATION SYSTEM:**

- Refrigeration system factory balanced using CFC free R134A (refrigerator), R404A (freezer) refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F (refrigerator), -10°F (freezer) interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

**ELECTRICAL CHARACTERISTICS:**

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1  
NEMA-5-15R

*Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.*

Specifications subject to change without notice.

Printed in U.S.A.




**APPROVALS:**

2/03

Exceptions:



# TUC-Series: Standard Depth Undercounter Units

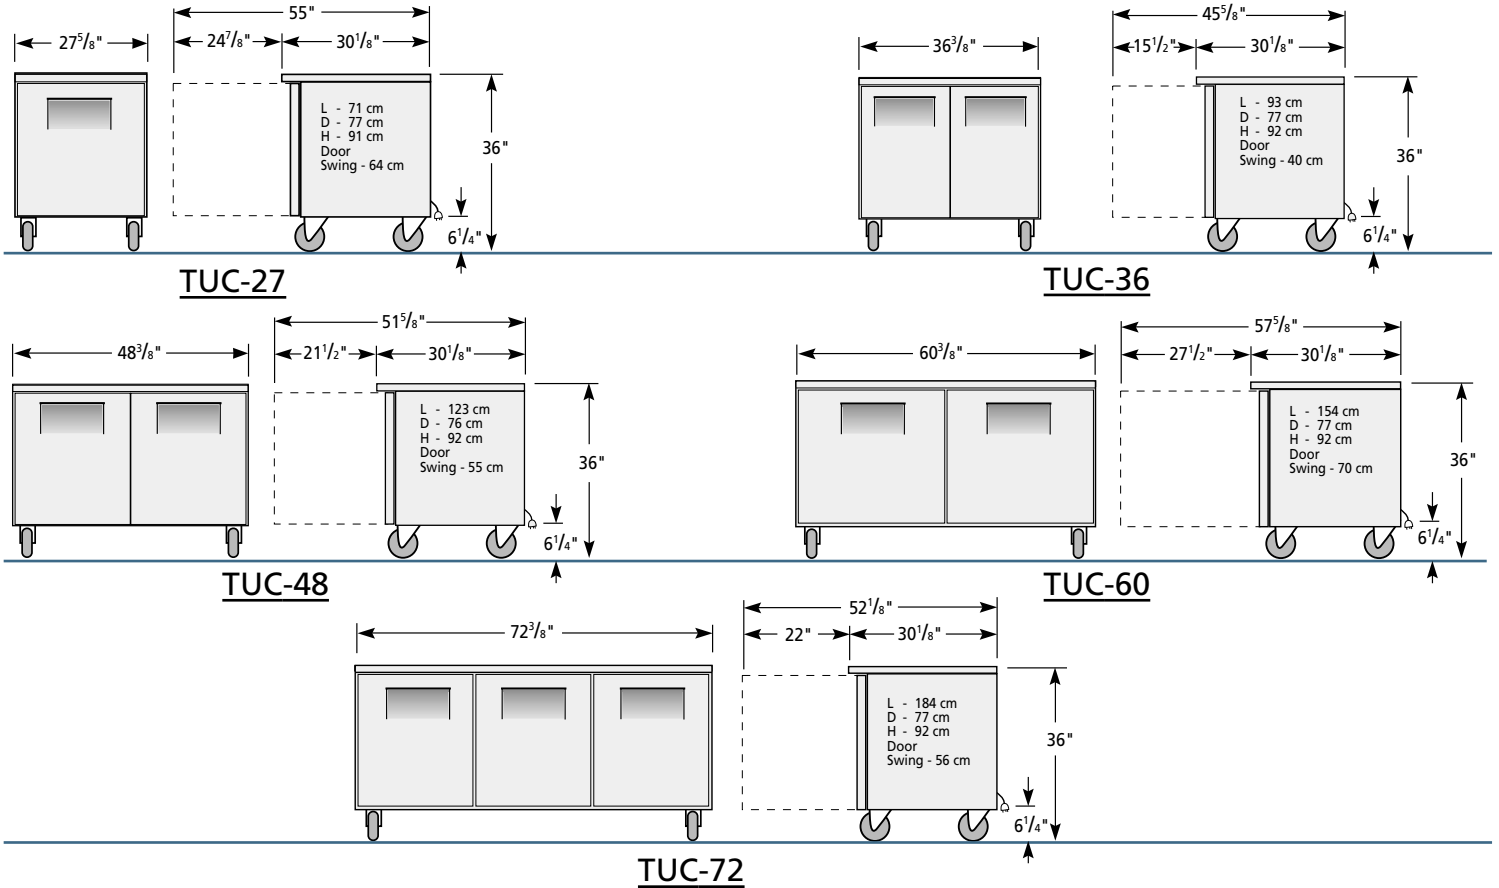

Rough-In Data													
Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D	H							
TUC-27 (1, 2, 3, 4)	1	6.5	2	27 5/8	30 1/8	36	1/5	115	1	4.6	5-15	7	161
TUC-36	2	8.5	4	36 3/8	30 1/8	36	1/3	115	1	8.3	5-15	7	210
TUC-48 (1, 2, 3)	2	12.0	4	48 3/8	30 1/8	36	1/3	115	1	8.6	5-15	7	243
TUC-60 (1, 2, 3)	2	15.5	4	60 3/8	30 1/8	36	1/3	115	1	7.8	5-15	7	287
TUC-72	3	19.0	6	72 3/8	30 1/8	36	1/2	115	1	10.5	5-15	7	350

(1) Available in drawered model (2) Available in freezer model  
 (3) Available in glass door model (4) Available in glass door freezer

Specifications subject to change without notice.

## Standard Features

- Oversized and balanced, environmentally friendly refrigeration system - holds 33°F to 38°F (134A, refrigerator), -10°F (R404A, freezer).
- Stainless steel front, top and sides.
- Interior - NSF approved, white vinyl coated aluminum sides and top, covered corners and 300 series stainless steel floor.
- Aluminum finished back.
- Door swings within cabinet dimensions.
- Work surface 36" high.
- Front breathing.
- Recessed handles on solid door models; glass door models feature triple pane glass and 12" aluminum handles.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Foamed-in-place high density polyurethane insulation (CFC free).
- 5" diameter castors standard equipment.
- Door/drawer variations available at full drawer list pricing.
- Self-contained system.
- Slide out compressor can be serviced easily and accessed by a single repairman.

- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.

## Optional Accessories

- Cutting board
- Stacking collar available for TUC-27, -27F.
- 6" stainless steel or optional seismic legs.
- 2 1/2" diameter castors available
- Low profile models with 2" castor package. 31 1/2" work surface height (available for TUC-27, -36, -48, -60 refrigerators). ADA compliant.
- Heavy, 16 gauge tops available.
- Basic overshef available for TUC-27, -48, -60.
- Service shelf available for TUC-48, -60, -72.

Model	Front	Right	Plan	3D
TUC-27	TFQY01E	TFQY01S	TFQY01P	TFQY013
TUC-36	TFP025E	TFPY25S	TFPY25P	TFPY253
TUC-48	TFQY02E	TFQY02S	TFQY02P	TFQY023
TUC-60	TFQY03E	TFQY03S	TFQY03P	TFQY033
TUC-72	TFQZ45E	TFQZ45S	TFQZ45P	TFQZ453

## Clearance Required For Coolers (USA)

Sides Inches/mm	Top Inches/mm	Rear Inches/mm
0 / 0	0 / 0	1 / 26



## TRUE FOOD SERVICE EQUIPMENT