



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

**G4SM Series -
Glass Door Merchandisers**



G4SM-23-RGS

TRUE is the world's largest manufacturer of glass door merchandisers.

Glass Door Reach-In Refrigerators

- G4SM-23**, **G4SM-23-PT**,
- G4SM-23RL** **G4SM-23RL-SI**,
- G4SM-23-RGS**

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- .040 copper aluminum exterior.
- White, vinyl coated aluminum interior top cabinet liner with 300 series stainless steel floor. Construction of liner in accordance with NSF standards.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection.
- Safety shielded fluorescent interior lighting.

DOORS:

- Triple pane thermal insulated glass. Doors extend full width of cabinet shell. Door gaskets of one piece construction.
- Adjustable, self closing, torsion type closure system. The face of each door fitted with a 12" long handle.

INSULATION:

- Entire cabinet structure insulated, using foamed-in-place CFC free polyurethane foam.

SHELVING:

wire shelf models

- 4 adjustable vinyl coated wire shelves. Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

glass shelf model

- 6 removable 19 5/8" glass shelves. Bottom mirrored shelf for reflective display. Shelves capable of supporting up to 30 lbs.
- Shelves slowly revolve.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Also available:

- Slide Door Models
- Freezer Models
- Wine Merchandiser
- Rear Load Models
- Ice Merchandisers
- Glass End Merchandisers
- Convenience Store Coolers
- Counter-Top Merchandisers
- Floral Merchandisers

Remote cabinets available 14% off list
(condensing units supplied by others).
Consult factory technical service dept. for BTU information.

Specifications subject to change without notice.

Printed in
U.S.A.




APPROVALS:

2/03

Exceptions:



G4SM Series: Glass Door Merchandisers - swing door

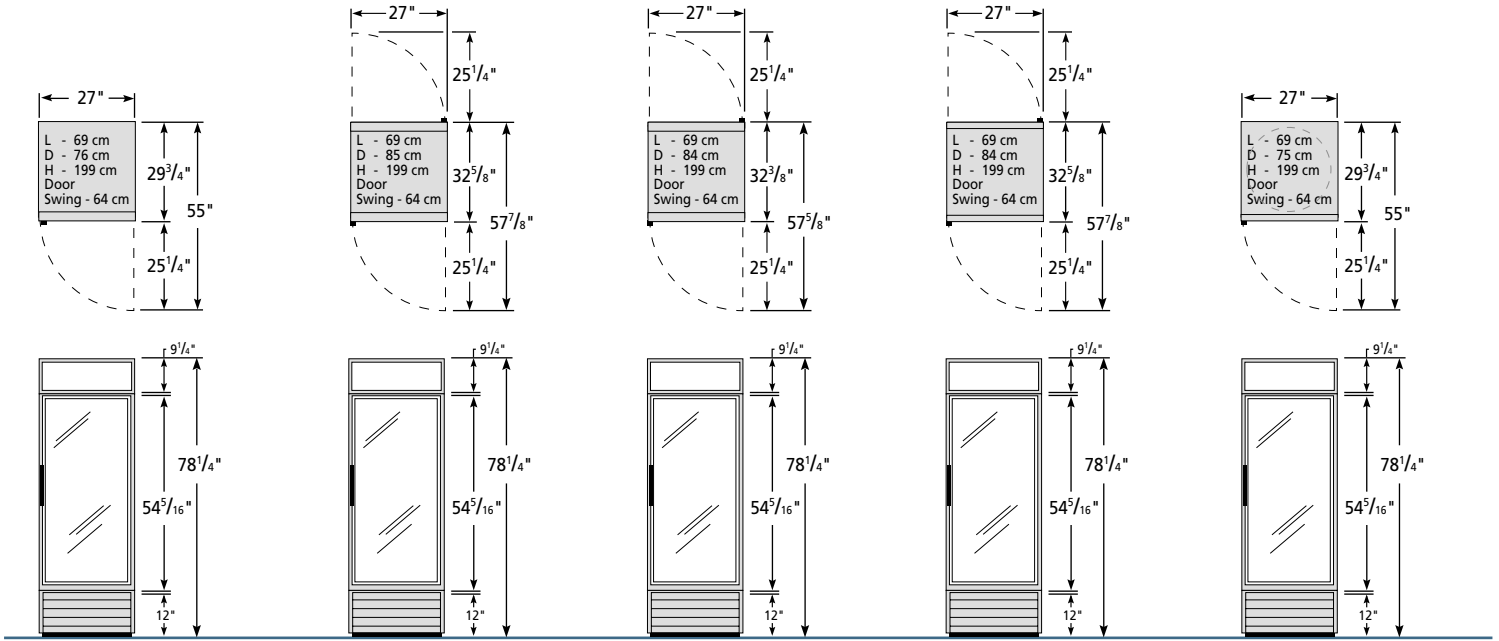

G4SM-23

G4SM-23-PT

G4SM-23RL

G4SM-23RL-SI

G4SM-23-RGS

Rough-In Data

Model	Swing Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D*	H							
G4SM-23	1	23	4	27	29 3/4	78 1/4	1/2	115	1	10.0	5-15	9	403
G4SM-23RL	1fr / 1 bk	23	4	27	32 3/4	78 1/4	1/2	115	1	10.0	5-15	9	416
G4SM-23RL-SI	1fr / 1 bk	23	4	27	32 3/4	78 1/4	1/2	115	1	10.0	5-15	9	416
G4SM-23-PT	1fr / 1 bk	23	4	27	33 1/2	78 1/4	1/2	115	1	10.0	5-15	9	425
G4SM-23-RGS	1	23	6	27	29 1/2	78 1/4	1/2	115	1	10.8	5-15	9	450

Rosewood, walnut, black & white vinyl exterior available at no extra charge. (not available in stainless steel).

Specifications subject to change without notice.

* Depth does not include 1 3/8" for door handles (rear load and pass-thru's have handles front and back).

Standard Features

- Oversized and balanced, environmentally friendly refrigeration system - holds 33°F to 38°F.
- High luster .040 copper aluminum exterior. (available in rosewood, walnut, black and white vinyl).
- White, vinyl coated aluminum interior top and 300 series stainless steel bottom (NSF approved).
- Triple pane thermal glass.
- Maximum product visibility with glass ends.
- Positive seal torsion type closure system, self-closing doors.
- Adjustable vinyl coated wire shelves (RGS model standard with six glass shelves).
- Epoxy coated evaporator.
- Fluorescent interior lighting (safety shielded).
- Foamed-in-place polyurethane high density cell insulation.
- Energy efficient.
- Low air velocity.
- Self contained system, no plumbing required.
- Bottom mount compressor.
- Slide out compressor can be serviced easily and accessed by a single repairman.

- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.
- See our website www.truemfg.com for the latest color & sign offerings.

Optional Accessories

- Additional shelves available.
- Barrel locks available.
- Available with 2 1/2" castors
- Available with stainless steel or optional seismic legs.

	Model	Front	Right	Plan	3D
	G4SM-23	TFAY10E	TFAY10S	TFAY10P	TFAY103
	G4SM-23RL	TFAY10E	TFAY32S	TFA032P	TFAY323
	G4SM-23RL-SI	TFAY10E	TFAY33S	TFA033P	TFAY333
	G4SM-23-PT	TFAY10E	TFAY34S	TFA034P	TFAY343
	G4SM-23-RGS	TFAY10E	TFAY10S	TFAY10P	TFAY103

Clearance Required For Coolers (USA)

Sides Inches/mm	Top Inches/mm	Rear* Inches/mm
0 / 0	0 / 0	1 / 26

* Does not apply to rear load or pass-thru models.



TRUE FOOD SERVICE EQUIPMENT