

## MODEL HCB2

DOUBLE SECTION HEAVY DUTY GAS  
CERAMIC BROILER



### SPECIFICATIONS

Heavy duty double section gas ceramic broiler, Vulcan-Hart Model No. HCB2. Stainless steel body and 6" legs. Four 25,000 BTU/hr. ceramic burners, 100,000 BTU/hr. input per per broiler section. Pilot ignition system. Two infinite heat control valves per broiler section. Each section has a floating grid rack assembly with positive positioning control handle. Eight grid positions. Broiler grid measures 25"w x 27 1/2"d. Open storage base. Exterior dimensions: 36"w x 38 3/8"d x 80 1/2"h on 6" adjustable legs.

CSA design certified. NSF listed.

**SPECIFY TYPE OF GAS WHEN ORDERING.**

**SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.**

### STANDARD FEATURES

- Stainless steel body and 6" adjustable legs.
- Four 25,000 BTU/hr. ceramic burners, 100,000 BTU/hr. input per broiler section.
- Pilot ignition system.
- Two infinite heat control valves per broiler section.
- Each section has a floating grid rack assembly with positive positioning control handle. Eight grid positions. Broiler grid measures 25"w x 27 1/2"d.
- Open storage base.
- 1" rear gas connection with gas pressure regulator.
- One year limited parts and labor warranty.

### OPTIONS


- Stainless steel back finishing panel.
- Set of four 5" diameter casters, two locking.
- Second year extended limited parts and labor warranty.

### ACCESSORIES

- Flexible gas hose with quick disconnect and restraining device. Consult price book for available sizes.

### IMPORTANT

1. A gas pressure regulator sized for this equipment is included. Natural gas 6.0" W.C., propane gas 10" W.C.
2. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02289. When writing, refer to NFPA No. 96.
3. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from the American Gas Association, 1515 Wilson Blvd., Arlington, VA 22209.
4. All models require a 6" (152 mm) clearance at both sides and rear adjacent to combustible construction.
5. This appliance is manufactured for commercial installation only and is not intended for home use.

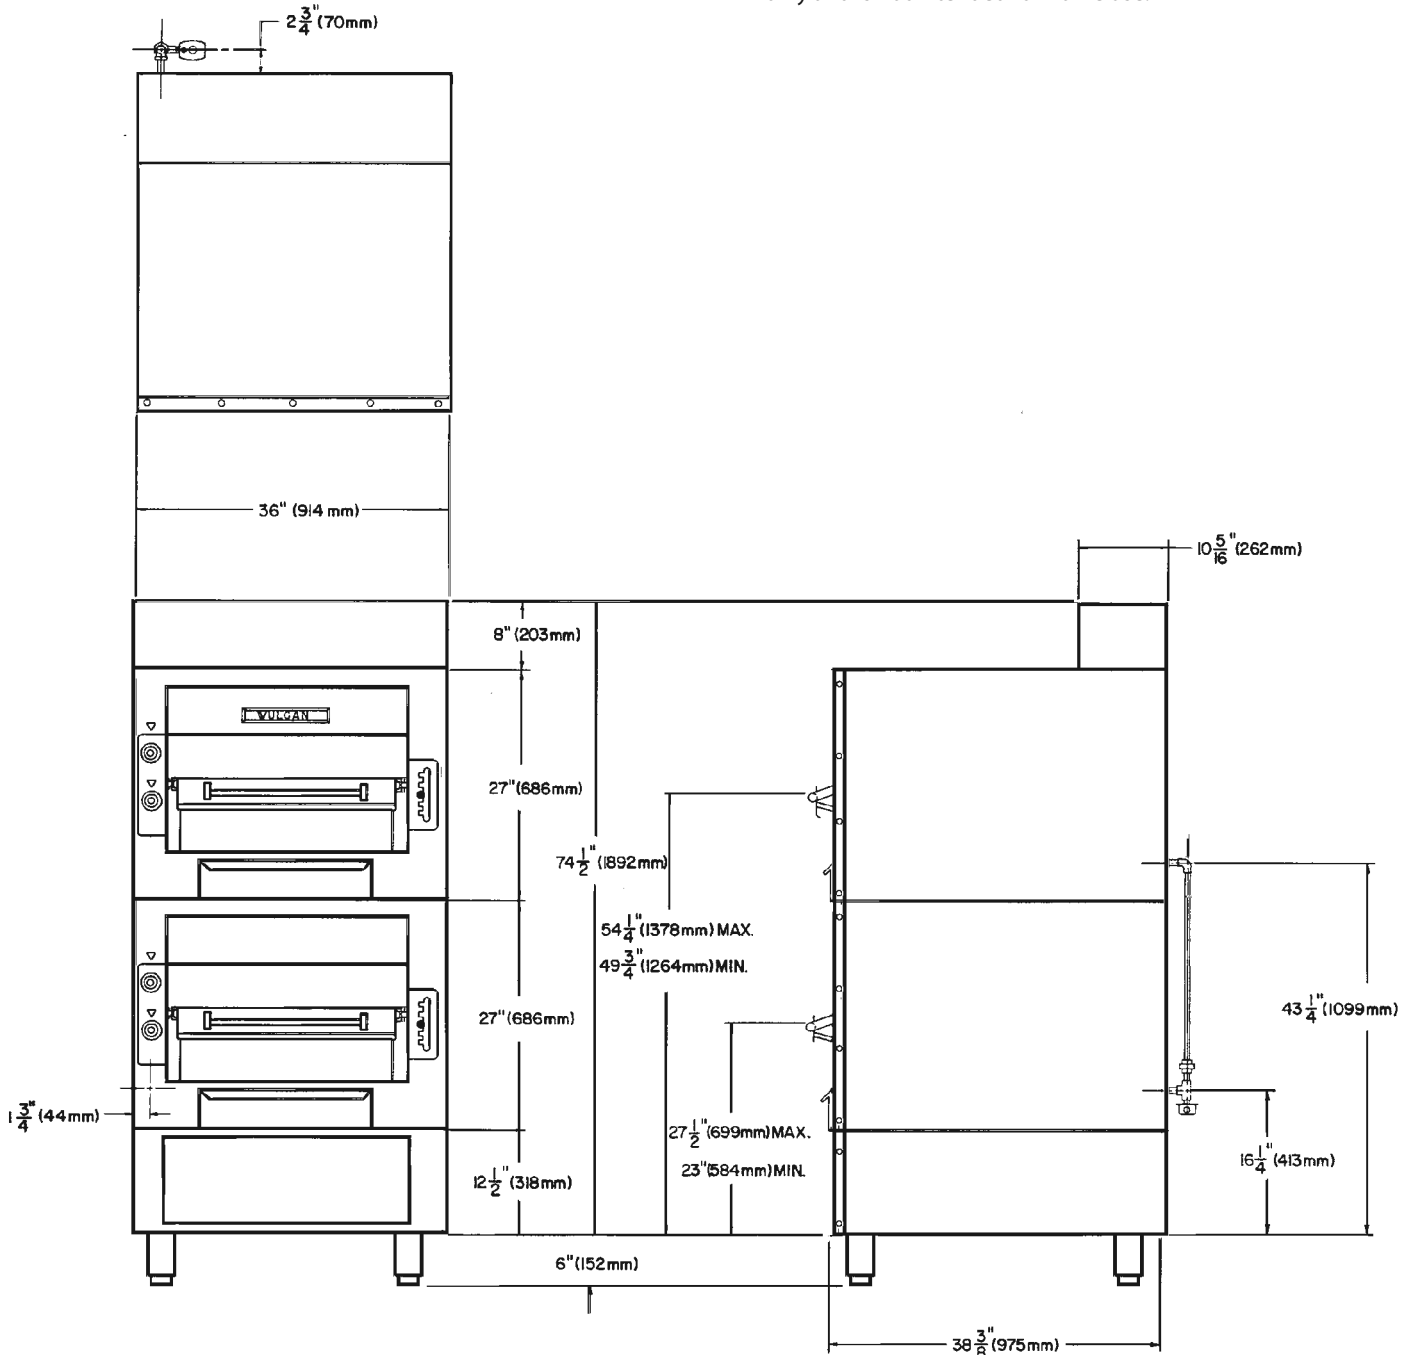

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.